

Designation: D4385 - 13

Standard Practice for Classifying Visual Defects in Thermosetting Reinforced Plastic Pultruded Products¹

This standard is issued under the fixed designation D4385; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope*

- 1.1 This practice covers acceptance criteria for visual acceptance of thermosetting reinforced plastic pultruded rods, bars, shapes, and sheets.
- 1.2 This practice presents definitions of possible defects to serve as a guide for contracts, drawings, product specifications, and final inspection.
- 1.3 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.
- 1.4 This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

Note 1-There is no known ISO equivalent to this standard.

2. Referenced Documents

2.1 ASTM Standards:²

D3917 Specification for Dimensional Tolerance of Thermosetting Glass-Reinforced Plastic Pultruded Shapes

3. Terminology

3.1 mat discoloration—a yellowing of the reinforcing mats caused by binder migration. The discoloration can cause visual streaks on the surface of the pultrusion.

- 3.2 test requirement—minimum design, characteristic or specified values as dictated and or specified by codes, standards, industry, end customers, the manufacturer or the Engineer of Record.
- 3.3 connection areas—areas associated with a pultruded member that form a connection in some form or fashion that will not be visible after fabrication.
- 3.4 fiber blooming—exposed reinforcements on the surface of a profile as a result of veil slippage or lack of resin. Such defects can cause the exposed fiber to "bloom" when exposed to ultraviolet light.
- 3.5 internal layer—refers to individual layers of unidirectional or transverse reinforcements in the form of roving/tows, continuous filament, woven or stitched mats formed and laminated via the pultrusion process to produce a specific thickness of or as part of a pultruded profile. A stitched or woven mat is made up of individual layers of roving woven or stitched together to form a single mat

4. Acceptance Criteria

- 4.1 The method and frequency of inspection shall be the responsibility of the pultruder as deemed necessary to maintain compliance to this specification, unless the purchaser and seller agree on other terms.
- 4.2 Dimensions and Tolerances—Pultruded shapes shall be inspected for conformance with dimensions and tolerances specified on the product drawing or by Specification D3917. Products with any dimensions exceeding the specified limits shall be rejected.
- 4.3 Allowable Defects—Defects that by nature, number, or frequency of occurrence do not affect the serviceability of the product. Allowable defects shall be fully described as to the type, size, number, extent allowed, and spacing. Defects in excess of those listed as allowable defects in the product specifications, drawings, or contracts, for the products, shall be cause for rejection.
- 4.4 Repairable Defects—Visual defects (for example, chips, exposed reinforcement, fiber bridging, fiber prominence, and

¹ This practice is under the jurisdiction of ASTM Committee D20 on Plastics and is the direct responsibility of Subcommittee D20.18 on Reinforced Thermosetting

Current edition approved Nov. 15, 2013. Published December 2013. Originally approved in 1984. Last previous edition approved in 2010 as D4385 - 10. DOI: 10.1520/D4385-13.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For Annual Book of ASTM Standards volume information, refer to the standard's Document Summary page on the ASTM website.

scuffing) that do not affect the structural serviceability that are permitted to be repaired if agreed upon between the manufacturer and the purchaser. The repair procedure shall be documented and contractually agreed upon by all parties involved.

5. Acceptance Levels

5.1 Visual Inspection—Each sample selected in accordance with 3.1 shall be checked visually without the aid of magnifi-

cation. Any defect not meeting the requirements of this standard, shall be cause for rejection. Any defect not covered in this specification shall be resolved between the purchaser and the seller and shall be fully described in the specification and contractual documents.

6. Keywords

6.1 pultrusion; structural shapes; visual

TABLE 1 Acceptance Criteria

Name	Definition	Acceptance/Rejection Criteria
Black Marking	Black smudges on the surface of the pultruded product that cannot be removed by cleaning, scrubbing, or wiping with solvent.	A single smudge shall fit in a 1 in. (25.4 mm) diameter circle. Multiple smudges are permitted.
	Note—This defect is cosmetic in nature and does	

not affect the structural serviceability.



Note: Photo shown depicts profile not meeting the specification

Blister

A rounded elevation of the pultruded profile surface with boundaries that has the potential to be sharply defined.

It is possible that blisters will exist within the pultrusion as a hollow delaminated area (gas-filled) under a raised portion of the surface.

Note—The rounded elevation somewhat resembles in shape a blister on the surface of human skin.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.

Permitted if formed between the surfacing veil layer and balance of laminate, width is no greater than 80 % of surface width, but limited to 1.25 in. (31.75 mm) in diameter and length is not over 8 in. (20.32 cm). Not more than two per 10 ft (3.048 m) of length. Popcorn blisters less than 0.060 in. (1.524 mm) in diameter and 0.010 in. (0.254 mm) high are permitted.

Blisters are not permitted within connection areas intended for bonding purposes.



Note: Photo shown depicts profile not meeting the specification.

Burn or Thermal Decomposition

Name

Definition

Acceptance/Rejection Criteria

Not acceptable.

A discoloration, distortion, or destruction of the pultruded surface as a result of thermal decomposition.

Note-This defect affects the structural serviceability.



Chips (Gouges)

Note: Photo shown depicts profile not meeting the specification.

Minor damage to the pultruded surface that removes N material but does not cause a crack or craze.

Not over 0.393 in. (10 mm) wide or long. Not more than five per 10 ft (3.048 m) length. Chips that penetrate past the depth of the surface veil are not permitted.

Note-This defect is cosmetic in nature and does not affect the structural serviceability.



Note: Photo shown depicts profile meeting the specification.

Name Crack Definition

serviceability.


Acceptance/Rejection Criteria

A visual separation that penetrates down from the pultruded surface to the equivalent of one full ply or more reinforcement 0.02 in. (0.508 mm). Reference

Internal Shrinkage Cracks.

Note—This defect affects the structural

Not acceptable.

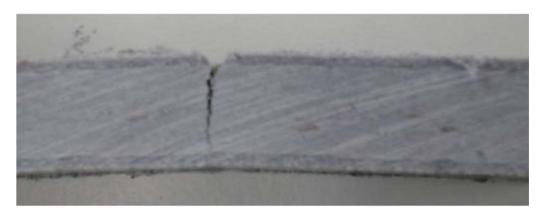

Note: Photo shown depicts profile not meeting the specification.

Crater

A small, shallow pultrusion surface imperfection.

Acceptable if it does not reduce the part thickness below the minimum specification.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.



Note: Photo shown depicts profile meeting the specification.

Name

Definition

Acceptance/Rejection Criteria

Craze

Multiple fine separation cracks at the pultruded surface not penetrating into the reinforcement or to the equivalent depth of one ply of reinforcement.

Acceptable and can be over the entire length of the

Note—This condition is usually due to resin shrinkage during cure in resin-rich areas.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.




Note: Photo shown depicts profile meeting the specification.

Delamination

The separation of two or more layers or plies of reinforcing material within a pultrusion.

Not acceptable.

Note—This defect affects the structural serviceability.

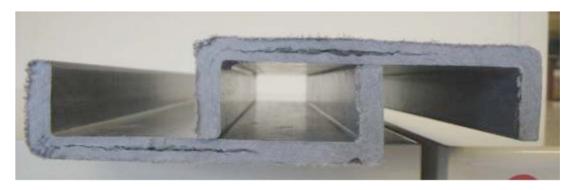

Note: Photo shown depicts profile not meeting the specification.

Name

Die Parting Line

Definition

A lengthwise flash or depression on the surface of a pultruded plastic part. The die parting line is not part of the dimensional tolerance.

Note—The die parting line is associated with the area where separate pieces of the die join together to form the cavity.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.

Acceptance/Rejection Criteria

The line projection caused by the die parting line shall not extend past the product's surface by more than 0.02 in. (0.508 mm). It shall not create a sharp feeling or have loose reinforcement fibers.




Note: Photo shown depicts profile meeting the specification.

Discoloration

A streak or other pattern on the surface that causes a noticeable change of color from the rest of the pultruded surface that has not been exposed to the weather.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.

Spots of any color not over 0.75 in. (19.05 mm) in diameter or eight per 10 ft (3.048 m) of length are permitted. Streaks or longitudinal stains permitted if not over 0.75 in. (19.05 mm) wide, 10 in. (25.4 cm) long, or more than six per 10 ft (3.048 m) of length. Continuous discolorations caused by a veil overlap or resin rich areas are permitted. Mat discolorations are not rejectable.



Note: Photo shown depicts profile meeting the specification.

Dry Fiber (Lack of Resin Fillout)

Name

Definition

Acceptance/Rejection Criteria

A condition in which fibers are not fully saturated by resin during pultrusion.

Note—This does not include surfacing veil.

Note—This defect affects the structural serviceability.

Not acceptable.



Note: Photo shown depicts profile not meeting the specification.

Dullness

A lack of normal pultruded surface gloss or shine.

Determine cause of condition and reference the "Insufficient Cure" section or "Stop Mark" section for direction.

Note—This condition can be caused by insufficient cure (typically in large areas), or a stop mark, (more defined and abbreviated in size), which result in a dull area on a pultruded profile.

Note—Where the condition has been determined to have been caused by insufficient cure, reference the "Insufficient Cure" section for direction and disposition. Where it has been determined as associated with a stop mark, the condition is purely cosmetic in nature and does not affect the structural serviceability, reference the "Stop Mark" section.



Note: Photo shown depicts profile not meeting the specification.

Name

Definition

Exposed Reinforcement/Veil Slippage

The underlying layer of roving not covered by surface material in a pultrusion.

Note-This defect is cosmetic in nature and does not affect the structural serviceability. Can lead to fiber blooming when exposed to sunlight.

Acceptance/Rejection Criteria

Permitted if surfacing material covers all but 0.4375 in. (11.112 mm) from each free edge, but not to exceed 25 % of the width of the surface being inspected or 10 % of the circumference of a round product. Carrier rovings can be used on the inside surface of a tube without rejection. Connection areas can have exposed rovings.



Note: Photo shown depicts profile not meeting the specification.

Fiber Bridging

Reinforcing fiber material that is found bridging across on an inside radius of a pultruded shape.

Note—This condition is caused by shrinkage stresses around such a radius during cure.

Note-This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Permitted if reinforcing fibers are encapsulated by resin, no corner cracks exist, and there is no evidence of delamination.



Note: Photo shown depicts profile meeting the specification.


Name Fiber Prominence Definition

Acceptance/Rejection Criteria

Permitted if reinforcing fibers are encapsulated by

A visible and measurable pattern of the reinforcing material on the surface of a pultruded plastic part.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if fibers are encapsulated by resin.

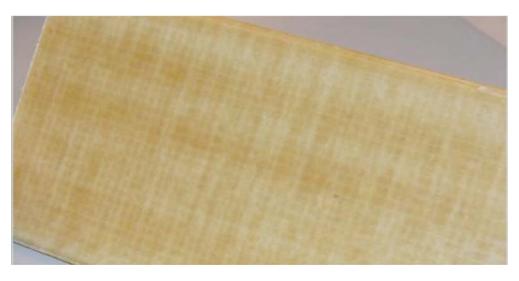

Note: Photo shown depicts profile meeting the specification.

Folded Reinforcement

An unintentional or unspecified misalignment of mat or fabric reinforcing material in relation to the contour of a pultruded section.

Note—It is possible that such folds will affect the surface appearance of the pultrusion and will be visible in a cut cross section of the product.

Note—It is possible that this condition is unavoidable and does affect the strength of a pultruded profile.

Permitted if properties meet the minimum mechanical and physical properties as published by manufacturer or properties agreed upon between pultruder and purchaser. Other visual requirements caused by mat folds must satisfy the specification.



Note: Photo shown depicts profile meeting the specification.

Name

Definition

Acceptance/Rejection Criteria

Cracks, crazing, or delamination, or a combination thereof, resulting from physical damage to the

pultrusion.

Not acceptable.

Note—This defect affects the structural serviceability.



Note: Photo shown depicts profile not meeting the specification.

Grooving

Fracture

Long narrow grooves or depressions in a surface of a pultrusion parallel to its length.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Permitted if material thickness reduction is not over 10 % and the groove width is 0.125 in. (3.175 mm) or less. Grooves on opposing surfaces of the cross sectional thickness are not permitted. Intermittent and continuous grooves are acceptable as long as the profile satisfies dimensional and mechanical requirements.



Note: Photo shown depicts profile meeting the specification.

Name Inclusion Definition

Acceptance/Rejection Criteria

Any foreign matter or particles that are either encapsulated or imbedded in the pultrusion.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Permitted if product meets test requirements. None in excess of 0.50 in. (12.7 mm) in diameter or no more than six per 10 ft (3.048 m) of length. No inclusion should create a surface blemish above the resin.



Note: Photo shown depicts profile not meeting the specification.

Insufficient Cure

A pultruded part abnormally created by lack of, or incomplete, crosslinking of the resin.

Repair by postcure if test requirements can be met and surface appearance is acceptable.

Note—This condition can usually be detected by dull surface appearance, low Barcol hardness, and low physical properties. Thick sections, cured from the outside in, can reveal insufficient cure in the center of the section even though completely cured on the surface. This condition can be caused by insufficient die temperature, improper catalyst, or pulling too fast for the die temperature.

Note—This defect affects the structural serviceability.



Note: Photo shown depicts profile not meeting the specification.

Name

Internal Shrinkage Cracks

Definition

Cracks in the pultrusion that are found within areas of roving reinforcement and terminate in the off-axis reinforcement.

Note—This condition is caused by shrinkage strains during cure that appear in the roving portion of the pultrusion where transverse strength is low.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Acceptance/Rejection Criteria

Permitted without numerical limit if the crack does not reach the surface of the product or penetrate through an internal layer of reinforcement and the product meets test requirements.



Note: Photo shown depicts profile meeting the specification.

Mat Splice

Stitching on or near the surface of the part that is utilized to splice mat reinforcements.


Permitted if dimensional requirements are met.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.



Note: Photo shown depicts profile meeting the specification.

Name	Definition	Acceptance/Rejection Criteria
Porosity, Internal (Void)	The presence of numerous pits or pinholes beneath the pultruded surface, usually observable only in a cut cross section.	No more than two pits/pinholes for every 0.0625 in. (1.6 mm) of thickness per 1.0 in. (25.4 mm) width.
	Note —This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.	Shapes exceeding the limits can be accepted if the properties including water absorption are satisfied.

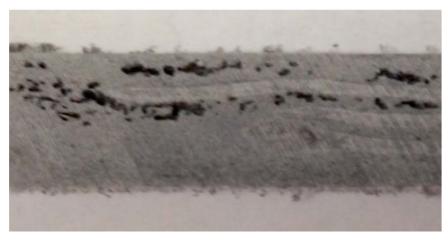

Note: Photo shown depicts profile not meeting the specification.

Porosity, Surface (Void)

The presence of numerous visible pits or pinholes at or near the pultruded surface.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Permitted if pits are less than 0.030 in. (0.762 mm) in diameter and 0.02 in. (0.508 mm) deep. Maximum of ten pits per 10 in.² (64.52 cm²) of area and no more than 4 % of cross-sectional area per 12 in. (305 mm) of product. Any surface porosity is permitted if the customer specifies that no surfacing veil is to be used. Reference the "Resin Voids" section.



Note: Photo shown depicts profile, with veil, not meeting the specification.

Name Reinforcement Distortion Definition

Knotted, tangled, widely spaced, or otherwise abnormal but local irregularities in reinforcement distribution throughout the pultruded cross section.

Note—This condition usually causes noticeable changes in the local reinforcement content with crushing of the reinforcement or resin-richness in isolated areas.

Note-This defect affects the structural serviceability.

Acceptance/Rejection Criteria

Permitted if defect fits in a 3 in. (76.2 mm) circle. Multiple occurrences permitted.



Note: Photo shown depicts profile not meeting the specification

An area of the pultrusion that lacks sufficient P

Resin Rich Area

reinforcement.

Permitted if product meets test requirement.

Note-It is possible that the fiber pattern will not be visible.

Note-This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.



Note: Photo shown depicts profile meeting the specification.

Resin Voids

Name

Definition

Acceptance/Rejection Criteria

Resin voids appearing as multiple surface interruptions that conform to the pattern of cloth weave or continuous strand mat. These defects occur only on the surface layer of resin in contact with the pultrusion die or mold that do not contain a veil

Acceptable on products that do not contain a surface veil. Not acceptable on parts containing a surface veil.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.



Note: Photo shown depicts profile meeting the specification.

Roving Knot

A knotted or entangled section of roving found in a pultrusion.

Note—It is possible that such a knot will cause high fiber concentration locally and that it will be visible as a white or light spot on the surface of the section.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.

Permitted if encapsulated with resin and product meets test requirements and dimensional tolerances.



Note: Photo shown depicts profile meeting the specification.

Name


Definition

Acceptance/Rejection Criteria

Blackening or carbonization of a cut surface of a pultruded section.

Permitted unless caused by dry fiber.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met and not caused by dry fiber.

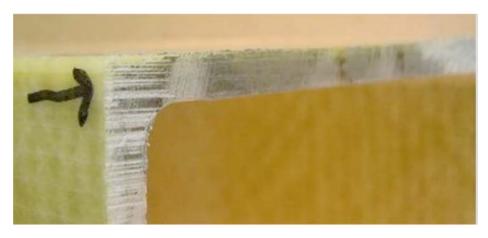

Note: Photo shown depicts profile meeting the specification.

Scale

Saw Burn

A condition wherein resin plates or particles are on the surface of a pultrusion. Permitted if removal does not expose dry fibers and dimensional tolerances are met.

Note—Scales can often be readily removed, sometimes leaving surface voids or depressions.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.



Note: Photo shown depicts profile meeting the specification.

Name

Scuffing

Definition

Long white scrape marks on the surface of the pultrusion.

Note—This condition usually results from mechanical scraping or scratching of the pultrusion in the machine or in handling it afterwards.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Acceptance/Rejection Criteria

Permitted if not over 0.75 in. (19.05 mm) wide or 12 in. (30.48 cm) long and not over five such marks per 10 ft (3.048 m) of length. On inside radius, permitted if not over 0.125 in. (3.175 mm) wide or 6.0 in. (15.24 cm) long even if they appear intermittently along each length.



Note: Photo shown depicts profile not meeting the specification.

Shrink Mark

A dimple like depression on the surface of a pultruded shape where it has retracted from the pultrusion die, and which has well-rounded edges. A shrink mark generally occurs on one surface of a part where there is a boss, flange, rib, or other heavy section on the opposite surface.

Note—This defect is cosmetic in nature and does not affect the structural serviceability.

Permitted if dimensional tolerances are met.



Note: Photo shown depicts profile meeting the specification.

Name Definition

spelled sloughing.

Acceptance/Rejection Criteria

Sluffing

A condition wherein scales peel off or become loose, either partially or entirely, from the pultrusion.

Note—This term is applied to an occurrence during the pultrusion process and is not to be confused with scraping, prying, or physically removing the scale from the pultrusion. Sluffing is sometimes

Note-This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Permitted if dimensional tolerances are met.



Note: Photo shown depicts profile meeting the specification.

Stop Mark

A band, either dull or glossy, on the surface, approximately 0.5 in. to 4 in. (12.7 to 101.6 mm) long and extending around the periphery of a pultruded shape.

Note-This condition is the result of an interruption in the normal continuous pulling operation.

Note-This defect is cosmetic in nature and does not affect the structural serviceability unless a burn or thermal decomposition occurs. Reference the "Burn or Thermal Decomposition" section.

Permitted, unless a burn or thermal decomposition occurs.



Note: Photo shown depicts profile meeting the specification.

Name

Undercure

Definition

Acceptance/Rejection Criteria

Insufficient cross linking of polymer chains. Can appear as dull and bleached surface color evident in

appear as dull and bleached surface color evident in pultruded material not exposed to the weather. It could be caused by inadequate process temperature and or catalyst chemistry. Not acceptable.

Note—This defect affects the structural serviceability.



Note: Photo shown depicts profile not meeting the specification.

Wrinkle Depression

An undulation or series of undulations or waves on the surface of the pultruded part.

Note—This condition can occur in either the lengthwise or crosswise direction of the pultrusion and is caused by reinforcement shifting and crowding. Reference the "Folded Reinforcement" section. Wrinkles affect the flatness of the surface.

Note—This defect is cosmetic in nature and does not affect the structural serviceability if Acceptance Criteria are met.

Depressions are permitted if less than 15 % of shape thickness and the minimum shape thickness and flatness specification are satisfied.



Note: Photo shown depicts profile meeting the specification.

SUMMARY OF CHANGES

Committee D20 has identified the location of selected changes to this standard since the last issue (D4385 - 10) that may impact the use of this standard. (November 15, 2013)

- (1) Deleted Level 1 and 2 in acceptance criteria.
- (3) Added quantifiable definitions to Table 1.
- (2) Added pictures depicting the defects along with the notes on acceptability of the product.
- (4) Added defect related to veil slippage.

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the ASTM website (www.astm.org/COPYRIGHT/).