



## OUR PRODUCTS



### Molded Grating

Integrally molded construction with Bi-directional load carrying capability. High resin content provides higher chemical corrosion resistance and fire retardancy.




### Covered Grating

Offers the same characteristics as std. grating with the benefits of a solid surface, which eliminates items from falling thru the panel grid. Slip resistant surface added for safety.




### Pultruded Grating

High strength unidirectional roving allows for greater load carrying capability on larger spans. Fire resistant and Chemical resistant.



### Structural Shapes

Standard Structural shapes include angles, I-beams, wide flange beams, channels and tube. Custom profile capabilities are available.



### Floor Plate

The anti-slip surface is ideal for slip/fall areas, where water, oil and hazardous liquids are present.



### Stair Treads

Molded and Pultruded stairtreads are available in two resin systems, polyester and vinylster. Standard and custom sizes available.



### Handrail

Constructed to OSHA standards using pultruded shapes. Safety rails guard slip/fall areas in the workplace.



### Caged Ladders

Stands up to rugged use in various environments. Design offers easy gripping and slip resistant traction.



## FIBERGLASS GRATING & STRUCTURAL SYSTEM SOLUTIONS



**Address:**  
1575 Lebanon School Rd  
Pittsburgh, PA 15122

**Call Us:**  
(412) 466-8611

**Mail Us:**  
Sales@libertypultrusions.com

**Office Hours:**  
Monday & Friday: 8AM-4PM  
Saturday & Sunday: Closed



LibertyPultrusions.com

LibertyPultrusions.com



# LIBERTY PULTRUSIONS

A Premier Fiberglass Grating  
& Structural System Manufacturer

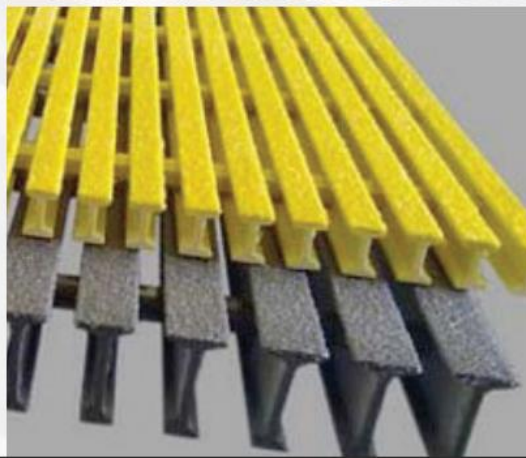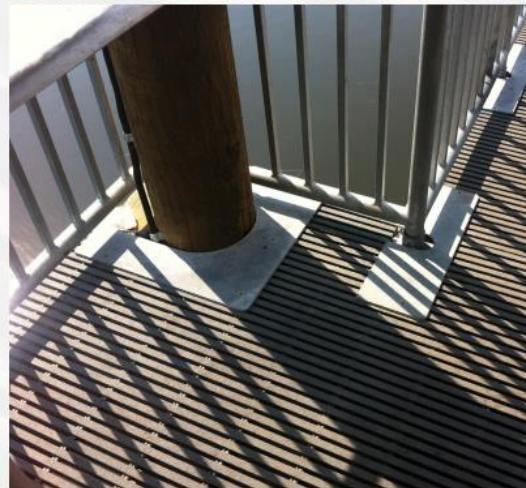

## LIBERTY PULTRUSIONS


For more than 40 years Liberty Pultrusions has been a premier leader in the Fiberglass Reinforced Plastics (FRP) Pultrusion industry. We are a customer-focused business that provides quality, cost-effective solutions. Our aggressive pricing, precision, expertise, and superior product quality are the traits that sustain our business and keep our customers happy.

The pultrusion process allows us to provide high-quality products that are superior and longer lasting than other types of materials such as steel, aluminum or timber. FRP Pultrusions are corrosion resistant, non-conductive to electricity and heat and very lightweight. Please read the Benefits of FRP Pultrusion Over Other Materials page for more information.


### A LEADER IN THE PULTRUSION INDUSTRY FOR OVER 40 YEARS

In addition to being a premier supplier of custom composites, we are also a major producer of FRP structural shapes for use in the corrosion, construction and electrical industries.

Our structural pultrusions, pultruded fiberglass electrical shapes and pultruded fiberglass rod are used in a wide range of applications from fiberglass cooling towers and structural supports to flagsticks and snow poles to ladder rail channels and transformer spacer sticks.



1. Integral, one-piece construction distributes load to both bearing bars and cross bars.
2. Interwoven continuous fiberglass roving comes wetout with resin during production.
3. Slip-resistant top surface.



1. Anti-slip plate
2. Grating
3. Grating covered with anti-slip plate as an integral corrosion resistant construction.

## Benefits of FRP Grating

### Light Weight, Easy Installation

1/4 weight of steel grating makes installation easy and eliminates the need for heavy lifting equipment. Effortless Cutting, snow poles to ladder rail channels and transformer spacer sticks.

### Long Service Life in Corrosive Environments.

Unparalleled performance in most harsh chemical environments, which could not be achieved by using traditional metal grating. No painting, and no maintenance is required. Please keep in mind, replacement costs

### A Whole Spectrum of Colors for Choice


Select any color as you like without any extra charges.

### Slip Resistance

Excellent test result (BS 7976-2) guarantees sure footing on both dry and wet working conditions.

### Fire Retardance and Low Temperature Resisitance

Fire retardance meets standards of ASTM E 84 Class 1. And what is more, extra low temperature tests witness the good performance at -196 degrees Celsius. Ideal materials for most projects.

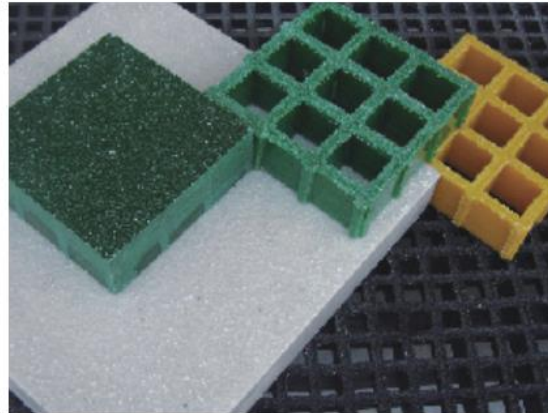

## Type of Grating

- Concave surface: Anti-Skid surface.
- Plain surface: Flat top after sanding.
- Grit surface: Extra slip-resistance as per BS 7976-2
- Cover surface: Available in smooth top, check pattern top and grit top.
- Mini mesh type grating prevents small tools and other objects from dropping through.

## Standard Resin Systems Available

Resin Type	Resin Base	Description	Corrosion Resistance	Flame Spread Rating ASTM E-84
VFR	Vinyl Ester	Superior Corrosion Resistance and Fire Retardant	Excellent	Class 1,25 or less
IFR	Isophthalic Polyester	Industrial Grade Corrosion Resistance and Fire Retardant	Very Good	Class 1,25 or less
PFR	Orthophthalic Polyester	Architectural Grade Corrosion Resistance and Fire Retardant	Very Good	Class 1,25 or less

## Find Superior-class Grating here!



Made with Special Tooling

Completed Through Unique Process

Treated in an Optional Non-filler Formula

Unparalleled in Chemical-resistance


Unsurpassed Mechanical Performance

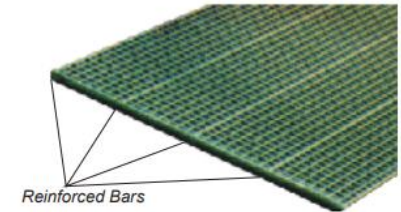


CHECK PLATE COVER



GRIT COVER



MICRO MESH



CONCAVE SURFACE



GRIT SURFACE




ANTI-STATIC GRATING


## Molded Grating Specifications

Type	Thickness	Mesh Size	Open Area	Weight/ Sq. Ft	Available Panel Size
Square	1/2"	1 1/2" x 1 1/2"	69%	1.5	4' x 8' 4' x 12'
Square	1/2"	2" x 2"	76%	1.3	4' x 8' 4' x 12'
Rectangular	1"	1" x 4"	69%	2.7	4' x 8' 4' x 12'
Square	1"	1 1/2" x 1 1/2"	69%	2.6	3' x 10' 4' x 8' 4' x 12'
Mini Mesh	1"	3/4" x 3/4"	44%	3.1	4' x 8' 4' x 12'
Square	1 1/4"	1 1/2" x 1 1/2"	69%	3.2	4' x 8' 4' x 12'
Square	1 1/2"	1 1/2" x 1 1/2"	69%	4.0	3' x 10' 4' x 8' 4' x 12' 5' x 10'
Mini Mesh	1 1/2"	3/4" x 3/4"	44%	4.7	4' x 8' 4' x 12'
Rectangular	1 1/2"	1 1/2" x 4"	78%	3.0	4' x 12'
Rectangular	1 1/2"	1" x 6"	38%	4.7	4' x 12'
Square	2"	2" x 2"	72%	4.5	4' x 8' 4' x 12'
Mini Mesh	2 3/8"	3/4" x 3/4"	42%	7.3	4' x 12'
High Load	2 1/2"	1 1/2" x 1 1/2" Square	47%	11	3' x 10' 4' x 8' 4' x 12' 5' x 10'
High Load	1 1/2"	1" x 2" Rectangular	48%	6.2	4' x 6' 4' x 8'
High Load	2"	1" x 2" Rectangular	48%	8.4	4' x 6' 4' x 8'
Stair Tread	1 1/2"	1 1/2" x 6" Rectangular	62%	3.2	24 1/4" x 12' 4' x 12'


- Note: 1. Panel weight may vary according to type of resin used and top surface.  
 2. Mesh size: Spacing between bar centers.  
 3. Other thicknesses and sizes are available upon request.

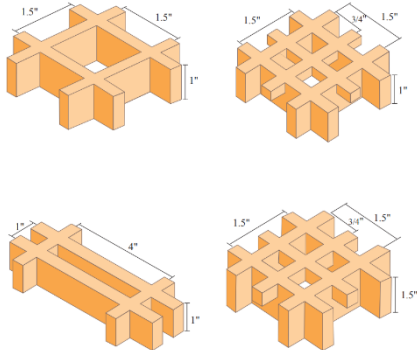

## Molded Grating Load and Deflection Data

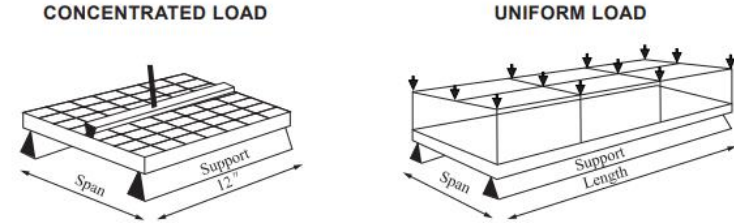


**S05-15**  
 0.5" Thick 1.5" x 1.5" Square Mesh  
 72% Open Area  
 1.34 lbs./ft<sup>2</sup>

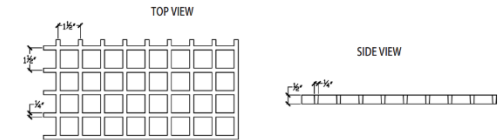

Span (inch)	CONCENTRATED LOAD in lbs/ft of width							Max Load
	50	150	200	300	500	1000	2000	
12	0.04	0.13	0.17	0.25	0.42			280
18	0.13	0.38	0.52	0.65				180
24	0.29							140

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load
	50	100	150	200	300	500	1000	2000	
12	0.03	0.05	0.08	0.11	0.15	0.29	0.58		350
18	0.12	0.24	0.36	0.48					150
24	0.37								80

**S05-20**  
 0.5" Thick 2.0" x 2.0" Square Mesh  
 78% Open Area  
 1.03 lbs./ft<sup>2</sup>

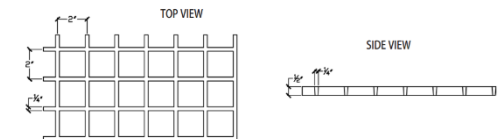


Span (inch)	CONCENTRATED LOAD in lbs/ft of width							Max Load
	50	100	150	200	300	500	1000	
12	0.05	0.11	0.15	0.20	0.27	0.51		230
18	0.15	0.32	0.45	0.64				150
24	0.39	0.68						110

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load
	50	100	150	200	300	500	1000	2000	
12	0.03	0.06	0.10	0.13	0.18	0.35	0.63		300
18	0.14	0.28	0.45	0.58					130
24	0.41								70

## R10-1040 1" Thick 1" x 4" Rectangular Mesh

68% Open Area  
2.62 lbs./ft<sup>2</sup>

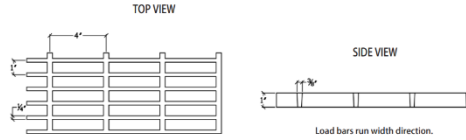


Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	50	100	150	200	300	500	1000	2000	
12		0.01	0.01	0.02	0.03	0.04	0.08	0.17	1830
18	0.01	0.03	0.04	0.05	0.06	0.13	0.25	0.49	1415
24	0.03	0.06	0.09	0.12	0.14	0.28	0.56		960
30	0.05	0.11	0.16	0.23	0.27	0.54			765
36	0.09	0.18	0.27	0.37	0.45				640
42	0.14	0.28	0.43	0.55	0.69				545
46	0.18	0.36							481

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load
	50	100	150	200	300	500	1000	2000	
12		0.01	0.01	0.01	0.02	0.03	0.05	0.11	3655
18	0.01	0.02	0.04	0.05	0.06	0.12	0.23	0.46	1820
24	0.04	0.07	0.11	0.14	0.18	0.35	0.74		960
30	0.09	0.17	0.250	0.34	0.42				585
36	0.17	0.35	0.52	0.69					420
42	0.31	0.63							311
46	0.43								272

## S10-15 1.0" Thick 1.5" x 1.5" Square Mesh

69% Open Area  
2.5 lbs./ft<sup>2</sup>

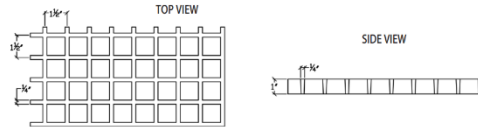


Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	50	100	150	200	300	500	1000	2000	
12		0.01	0.02	0.03	0.04	0.06	0.14	0.23	1140
18	0.02	0.04	0.05	0.07	0.09	0.18	0.36		930
24	0.04	0.08	0.12	0.16	0.22	0.41			660
30	0.07	0.15	0.28	0.34	0.41				530
36	0.18	0.26	0.38	0.52	0.69				350

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load
	50	100	150	200	300	500	1000	2000	
12		0.0	0.01	0.02	0.03	0.04	0.07	0.14	2300
18	0.02	0.03	0.05	0.07	0.09	0.17	0.33	0.66	1200
24	0.05	0.10	0.150	0.21	0.29	0.498			660
30	0.12	0.27	0.36	0.47	0.63				420
36	0.24	0.48							210

## S10-075 1.0" Thick 0.75" x 0.75" Mini Mesh

44% Open Area  
3.08 lbs./ft<sup>2</sup>

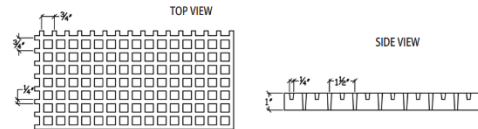


Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	50	100	150	200	300	500	1000	2000	
12			0.01	0.01	0.02	0.03	0.07	0.23	1520
18	0.01	0.02	0.03	0.04	0.06	0.10	0.25	0.42	960
24	0.03	0.06	0.09	0.11	0.17				680
30	0.06	0.11	0.18	0.22					550
36	0.10	0.20	0.28	0.39					400

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load
	50	100	150	200	300	500	1000	2000	
12			0.01	0.01	0.02	0.04	0.08	0.2510	
18	0.01	0.02	0.04	0.05	0.07	0.12	0.23	0.47	1310
24	0.04	0.07	0.11	0.15	0.22	0.36	0.73		710
30	0.09	0.17	0.26	0.35	0.52	0.87			460
36	0.19	0.38							230

## S15-15 1.5" Thick 1.5" x 1.5" Square Mesh

68% Open Area  
3.95 lbs./ft<sup>2</sup>

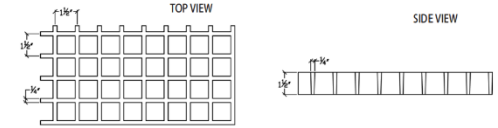


Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load	
	50	100	150	200	300	500	1000	2000		
12					0.01	0.02	0.03	0.04	0.09	2010
18			0.01	0.02	0.03	0.04	0.06	0.11	0.22	1320
24	0.01	0.02	0.04	0.05	0.06	0.12	0.23	0.46	1010	
30	0.02	0.04	0.06	0.09	0.17	0.24	0.48		810	
36	0.04	0.07	0.11	0.14	0.18	0.36			640	
42	0.06	0.13	0.19	0.25	0.28	0.56			530	
48	0.08	0.17	0.25	0.34	0.48				490	
54	0.12	0.28	0.37	0.48	0.59				430	

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load	
	50	100	150	200	300	500	1000	2000		
12					0.0	0.02	0.03	0.06	4020	
18			0.01	0.02	0.02	0.04	0.05	0.10	0.21	1810
24	0.01	0.03	0.04	0.06	0.07	0.15	0.32	0.58	920	
30	0.03	0.07	0.10	0.14	0.17	0.34	0.68		630	
36	0.07	0.15	0.20	0.27	0.37	0.67			430	
42	0.13	0.26	0.37	0.49	0.66				310	
48	0.21	0.47	0.66						215	
54	0.34	0.69							185	

## S15-075 1.5" Thick 0.75" x 0.75" Mini Mesh

44% Open Area  
4.78 lbs./ft<sup>2</sup>

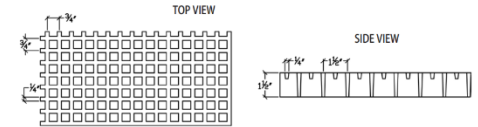


Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load	
	50	100	150	200	300	500	1000	2000		
12					0.01	0.02	0.03	0.06	3090	
18			0.01	0.013	0.17	0.03	0.05	0.09	0.17	2060
24	0.01	0.02	0.03	0.04	0.05	0.09	0.18	0.35	1540	
30	0.02	0.03	0.05	0.06	0.08	0.16	0.32	0.64	1230	
36	0.03	0.05	0.08	0.11	0.15	0.27	0.53		1030	
42	0.04	0.08	0.14	0.17	0.27	0.43			880	
48	0.06	0.12	0.18	0.26	0.32	0.65			730	
54	0.09	0.17	0.26	0.39	0.44				670	
60	0.12	0.23	0.37	0.46	0.59				584	

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load	
	50	100	150	200	300	500	1000	2000		
12					0.01	0.02	0.03	0.04	6010	
18			0.01	0.01	0.02	0.03	0.04	0.08	0.19	2470
24	0.01	0.02	0.3	0.04	0.06	0.11	0.22	0.44	1450	
30	0.03	0.05	0.08	0.10	0.15	0.25	0.52		928	
36	0.05	0.10	0.17	0.21	0.29	0.49			670	
42	0.09	0.18	0.27	0.36	0.45				485	
48	0.15	0.32	0.45	0.65					360	
54	0.29	0.48							305	
60	0.37								215	

## S20-20 2.0" Thick 2.0" x 2.0" Square Mesh


72% Open Area  
4.38 lbs./ft<sup>2</sup>

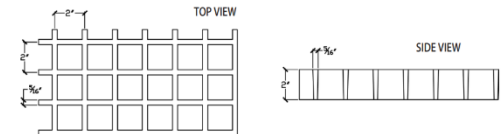

Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load	
	50	100	150	200	300	500	1000	2000		
12					0.01	0.02	0.04	0.04	4320	
18				0.01	0.02	0.03	0.04	0.06	0.14	3080
24	0.01	0.02	0.03	0.04	0.06	0.12	0.24	0.45	2160	
30	0.01	0.02	0.04	0.05	0.06	0.13	0.25	0.45	1530	
36	0.02	0.04	0.07	0.08	0.11	0.19	0.38		1440	
42	0.03	0.06	0.09	0.13	0.18	0.32	0.59		1230	
48	0.04	0.09	0.13	0.18	0.27	0.45			1080	
54	0.06	0.12	0.18	0.26	0.35	0.61			990	
60	0.08	0.17	0.29	0.34	0.45				860	

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load	
	50	100	150	200	300	500	1000	2000		
12					0.01	0.02	0.04	0.05	9240	
18				0.01	0.02	0.03	0.04	0.05	0.11	4010
24	0.01	0.02	0.03	0.04	0.05	0.08	0.15	0.30	2160	
30	0.02	0.03	0.05	0.07	0.09	0.16	0.35		1402	
36	0.04	0.07	0.11	0.14	0.19	0.28			920	
42	0.07	0.13	0.19	0.29	0.33	0.37			660	
48	0.11	0.27	0.36	0.45	0.54	0.67			560	
54	0.18	0.34	0.54	0.69					450	
60	0.29	0.59							345	


**R15-1060T**  
1.5" Thick 1.0" x 6.0" Rectangular Mesh  
(Pultrusion style)  
38% Open Area  
4.7 lbs./ft<sup>2</sup>

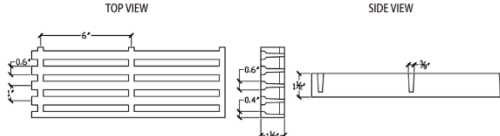

Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	50	100	150	200	300	500	1000	2000	
12					0.01	0.02	0.03	0.05	3510
18			0.01	0.02	0.03	0.04	0.07	0.13	2610
24		0.01	0.02	0.03	0.03	0.06	0.13	0.26	2050
30	0.01	0.03	0.04	0.06	0.08	0.12	0.23	0.47	1480
36	0.02	0.04	0.06	0.09	0.12	0.19	0.39		1330
42	0.03	0.06	0.09	0.15	0.15	0.33	0.65		1020
48	0.05	0.09	0.14	0.23	0.23	0.46			1020
54	0.06	0.15	0.20	0.31	0.43	0.67			930
60	0.09	0.17	0.26	0.47	0.47				820

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load
	50	100	150	200	300	500	1000	2000	
12						0.01	0.02	0.03	6520
18			0.01	0.02	0.03	0.04	0.06	0.14	3470
24	0.01	0.02	0.03	0.04	0.05	0.08	0.16	0.35	2050
30	0.02	0.04	0.06	0.07	0.09	0.18	0.36		1300
36	0.04	0.07	0.11	0.15	0.19	0.38			930
42	0.07	0.13	0.20	0.27	0.33	0.67			670
48	0.12	0.23	0.34	0.46	0.57				520
54	0.18	0.35	0.59						405
60	0.27	0.54							310


**R15-1540**  
1.5" Thick 1.5" x 4.0" Rectangular Mesh  
77% Open Area  
2.67 lbs./ft<sup>2</sup>

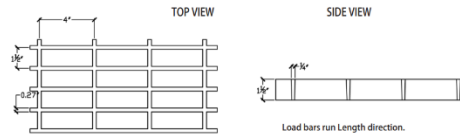

Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	50	100	150	200	300	500	1000	2000	
12		0.01	0.01	0.01	0.02	0.03	0.06	0.11	2010
18	0.01	0.02	0.03	0.04	0.06	0.10	0.20		1067
24	0.02	0.05	0.07	0.09	0.14	0.23			867
30	0.04	0.09	0.13	0.18	0.27				633
36	0.08	0.15	0.23	0.31					500
42	0.13	0.25	0.38						417
48	0.19	0.37							333

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load
	50	100	150	200	300	500	1000	2000	
12						0.01	0.02	0.03	3040
18		0.01	0.01	0.02	0.03	0.04	0.07	0.14	1410
24	0.01	0.02	0.03	0.07	0.05	0.09	0.18	0.36	810
30	0.02	0.04	0.06	0.08	0.11	0.22	0.42		579
36	0.04	0.08	0.12	0.16	0.21	0.39			270
42	0.07	0.14	0.23	0.29	0.36				171
48	0.12	0.24	0.37	0.48	0.61				117

**S25-15**  
2.5" Thick 1.5" x 1.5" Square Mesh  
47% Open Area  
10.9 lbs./ft<sup>2</sup>

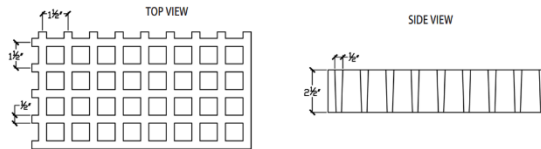


Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	50	100	150	200	300	500	1000	2000	
24					0.01	0.01	0.03	0.06	16660
30				0.01	0.02	0.03	0.06	0.11	10660
36		0.01	0.01	0.02	0.03	0.05	0.10	0.20	7333
42	0.01	0.02	0.02	0.03	0.05	0.08	0.16	0.31	5600
48	0.01	0.02	0.03	0.05	0.07	0.12	0.23	0.47	4667
54	0.02	0.03	0.05	0.07	0.10	0.16	0.33	0.66	3733
60	0.02	0.05	0.07	0.09	0.14	0.23	0.46		2933
66	0.03	0.06	0.09	0.12	0.18	0.30	0.61		2400


Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>								Max Load			
	50	100	150	200	300	500	1000	2000				
24						0.01	0.01	0.01	0.02	0.04	0.07	13600
30			0.01	0.01	0.02	0.03	0.04	0.09	0.18			6400
36	0.01	0.02	0.03	0.04	0.06	0.10	0.19	0.38				3840
42	0.02	0.03	0.05	0.07	0.10	0.17	0.35					2600
48	0.03	0.06	0.09	0.12	0.18	0.30	0.59					1800
54	0.05	0.09	0.14	0.19	0.28	0.47						1280
60	0.07	0.15	0.22	0.29	0.44	0.73						880
66	0.11	0.21	0.32	0.43	0.64							680

## High Load Capacity Molded Grating

Molded High Load Capacity grating is yet another product in the arsenal of engineered fiberglass reinforced plastic solutions. While capitalizing on most of the traditional benefits of molded grating products: high strength, corrosion resistance, fire retardancy, non-conductivity, and low maintenance, this specially manufactured molded FRP product has been engineered to carry forklift loads that traditional molded FRP grating products are unable to support. With a 48% open surface area, Liberty Pultrusions molded HLC grating is available in a 4' x 6' panel with depths of 1-1/2" and 2" in either Liberty Pultrusions ISO and VE Resin systems. Surface options include either a smooth surface or a grit surface. Liberty Pultrusions molded HLC grating merits an ASTM E-84 flame spread rating of 25 or less and a Class 1 Fire Rating.




**R15-1020**  
1.5" Thick 1.0" x 2.0" Rectangular Mesh  
48% Open Area  
6.32 lbs./ft<sup>2</sup>



Span (inch)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	200	500	1000	2000	3000	4000	5000		
18		0.02	0.04	0.07	0.11	0.15	0.19	26,070	
24	0.02	0.04	0.09	0.17	0.26	0.34	0.44	19,530	
36	0.06	0.14	0.28					12,520	
42	0.09	0.22	0.44					10,890	

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>						Max Load
	200	400	500	600	800	1000	
18		0.01	0.02	0.02	0.03	0.03	35,100
24	0.02	0.04	0.05	0.06	0.09	0.11	19,910
36	0.10	0.21	0.26	0.31	0.42		7,840
42	0.19	0.39	0.48				5,790

**R20-1020**  
2.0" Thick 1.0" x 2.0" Rectangular Mesh  
48% Open Area  
8.65 lbs./ft<sup>2</sup>




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load
	200	500	1000	2000	3000	4000	5000		
18		0.01	0.03	0.05	0.07	0.10	0.13	31,510	
24	0.02	0.03	0.06	0.11	0.17	0.22	0.27	25,450	
36	0.04	0.09	0.17	0.34	0.51			17,320	
42	0.05	0.13	0.26					14,520	

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>						Max Load
	200	400	500	600	800	1000	
18		0.01	0.01	0.01	0.02	0.02	43,440
24	0.01	0.02	0.03	0.04	0.05	0.06	27,150
36	0.06	0.12	0.15	0.18	0.24	0.30	8,550
42	0.11	0.22	0.28	0.33	0.44		7,390

## Allowable Spans for Vehicular Loads


	Wheel Load (lb) (1/2 Axle Load + 30% impact)	Load Distribution		Allowable Span in Inches	
		Parallel to Axle	Perpendicular to Axle	1.5" Deep HLC Molded Grating	2" Deep HLC Molded Grating
AASHTO Standard Truck 31,000 lb Axle Load - Dual Wheels	26,800	20' x 4'	8'	1'-2"	1'-5"
Automobile Traffic 5,000 lb Vehicle - 1,500 lb Load 50% Drive Axle Load	2,220	8' x 4'	8'	2'-2"	2'-8"
5 Ton Capacity Forklift 14,000 lb Vehicle - 24,000 lb Load 50% Drive Axle Load	13,480	11' x 4'	11'	1'-11"	1'-5"
3 Ton Capacity Forklift 9,000 lb Vehicle - 12,000 lb Load 50% Drive Axle Load	8,730	7' x 4'	7'	1'-0"	1'-4"
1 Ton Capacity Forklift 4,000 lb Vehicle - 6,000 lb Load 50% Drive Axle Load	3,425	4' x 4'	4'	1'-7"	2'-1"

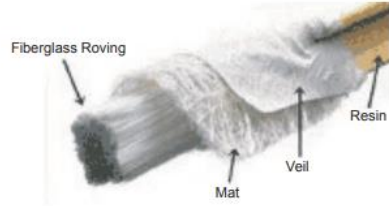

### The advantages of pultruded FRP Sections

1. Corrosion resistant and anti-aging
2. Non-conductive and non magnetic
3. Light weight and great strength and impact strength
4. Long service life and maintenance-free
5. Bright color and good appearance
6. Easy of installation and dimensional stability
7. Water-proof, fire retardant

### Pultruded Grating

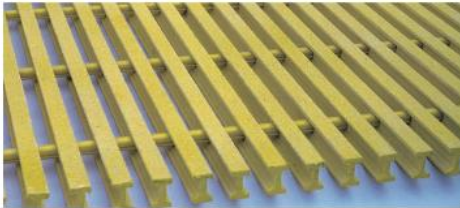

- ◆ High Content of Fiberglass
- ◆ Extremely High Unidirectional Strength and Stiffness
- ◆ Where Long Spans and High Load Capacity Required
- ◆ Good Corrosion Resistance
- ◆ Long Life
- ◆ Low Maintenance & Installation Cost



The raw materials for pultrusion include a liquid resin mixture (containing resin, fillers and specialized additives) and reinforcing fibers. To achieve the reinforcement purpose, materials in continuous forms such as rolls of fiberglass mat and doffs of fiberglass roving are used. During the pultrusion process, the raw materials are pulled through a heated steel forming die. When the reinforcements are saturated with the resin mixture ("wet-out") in the resin bath and pulled through the die, the resin comes hardened due to the heat from the die and the cured profiles are thus formed in the same shape as the die.


### Pultruded Grating Specification

Series	Thickness	Load Bar Type & Spacing	Cross Rod Spacing	Open Area	Weight/ Sq. Ft	Available Panel Size
WT-1810	1.0"	T 2.0"	6"	18%	2.41	3' x 20' 4' x 20'
WT-3510	1.0"	T 2.5"	6"	35%	2.03	3' x 20' 4' x 20'
T-3310	1.0"	T 1.5"	6"	33%	2.28	3' x 20' 4' x 20'
T-5010	1.0"	T 2.0"	6"	50%	1.82	3' x 20' 4' x 20'
T-1715	1.5"	T 1.2"	6"	17%	3.42	3' x 20' 4' x 20'
T-3315	1.5"	T 1.5"	6"	33%	2.83	3' x 20' 4' x 20'
T-5015	1.5"	T 2.0"	6"	50%	2.25	3' x 20' 4' x 20'
WT-4015	1.5"	T 2.5"	6"	40%	2.61	3' x 20' 4' x 20'
WT-2515	1.5"	T 2.0"	6"	25%	3.22	3' x 20' 4' x 20'
WT-1515	1.5"	T 1.75"	6"	15%	3.50	3' x 20' 4' x 20'
T-3320	2.0"	T 1.5"	6"	33%	4.26	3' x 20' 4' x 20'
T-5020	2.0"	T 2.0"	6"	50%	3.32	3' x 20' 4' x 20'
I-4010	1.0"	I 1.0"	6"	40%	3.52	3' x 20' 4' x 20'
I-5010	1.0"	I 1.2"	6"	50%	3.02	3' x 20' 4' x 20'
I-6010	1.0"	I 1.5"	6"	60%	2.52	3' x 20' 4' x 20'
I-4015	1.5"	I 1.0"	6"	40%	4.25	3' x 20' 4' x 20'
I-5015	1.5"	I 1.2"	6"	50%	3.65	3' x 20' 4' x 20'
I-6015	1.5"	I 1.5"	6"	60%	3.05	3' x 20' 4' x 20'
I-4010 ADA	1.0"	I 0.52"	6"	40%	4.11	3' x 20' 4' x 20'
I-5010 ADA	1.0"	I 0.63"	6"	50%	3.52	3' x 20' 4' x 20'
I-6010 ADA	1.0"	I 0.78"	6"	60%	2.95	3' x 20' 4' x 20'
I-4015 ADA	1.5"	I 0.52"	6"	40%	5.35	3' x 20' 4' x 20'
I-5015 ADA	1.5"	I 0.63"	6"	50%	4.65	3' x 20' 4' x 20'
I-6015 ADA	1.5"	I 0.78"	6"	60%	3.75	3' x 20' 4' x 20'
HD-4015	1.5"	HD 1.0"	6"	40%	9.21	3' x 20' 4' x 20'
HD-5015	1.5"	HD 1.2"	6"	50%	7.71	3' x 20' 4' x 20'
HD-6015	1.5"	HD 1.5"	6"	60%	6.26	3' x 20' 4' x 20'
HD-4020	2.0"	HD 1.0"	6"	40%	11.9	3' x 20' 4' x 20'
HD-5020	2.0"	HD 1.2"	6"	50%	9.95	3' x 20' 4' x 20'
HD-6020	2.0"	HD 1.5"	6"	60%	8.05	3' x 20' 4' x 20'


- Note: 1. Panel weight may vary according to type of resin used and top surface.  
 2. Spacing between bar centers.  
 3. Other thicknesses and sizes are available upon request.

## Pultruded Grating Load and Deflection Data

### CONCENTRATED LOAD

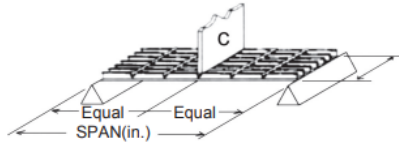

### UNIFORM LOAD

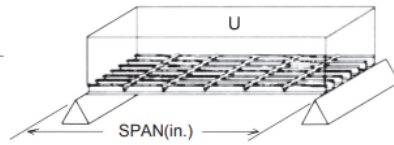


The designer should not exceed MAXIMUM-RECOMMENDED load at any time. MAXIMUM LOAD represents a 4 : 1 factor of safety on ULTIMATE CAPACITY. ULTIMATE CAPACITY represents MAX LOAD observed at initial fracture.

Walking loads for maintenance traffic are typically a live load of 50 PSF. Deflections for worker comfort are typically limited to 3/8" or SPAN divided by 120 under full live load. For a firmer feel under full live load or a line load 250 lbs/ft of width, limit deflections to 1/4" or SPAN divided by 200.

The loads represented are for STATIC LOAD CONDITIONS at ambient temperature. Deflections for impact loads or dynamic loads will MULTIPLY the deflections shown by 2. Long term loads will result in added deflection due to creep in the material and will require higher factors of safety to ensure acceptable performance.


**WT-1810**  
Wide T Bearing Bar  
1" Thick 18% Open Area  
2.41 lbs/ft<sup>2</sup>



Span (inch)	CONCENTRATED LOAD in lbs/ft of width									Max Load
	50	100	150	200	300	500	1000	2000		
12										5110
18		0.01	0.02	0.02	0.03	0.05	0.10	0.20		2400
24	0.01	0.02	0.04	0.05	0.06	0.11	0.22	0.46		2550
30	0.02	0.04	0.06	0.08	0.11	0.21	0.44			2040
36	0.04	0.07	0.11	0.14	0.18	0.35				1710
42	0.06	0.11	0.17	0.22	0.28	0.55				1420
46	0.08	0.16	0.25	0.35	0.46					1240

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>									Max Load
	50	100	150	200	300	500	1000	2000		
12										10310
18	0.01	0.01	0.02	0.03	0.04	0.05	0.10	0.19		4560
24	0.02	0.03	0.04	0.06	0.068	0.14	0.27	0.55		2540
30	0.03	0.07	0.10	0.13	0.162	0.33	0.66			1540
36	0.07	0.13	0.20	0.28	0.33	0.66				1130
42	0.12	0.24	0.36	0.48	0.63					810
46	0.21	0.41	0.62							625


**WT-3510**  
Wide T Bearing Bar  
1" Thick 35% Open Area  
2.03 lbs/ft<sup>2</sup>



Span (inch)	CONCENTRATED LOAD in lbs/ft of width									Max Load
	50	100	150	200	300	500	1000	2000		
12										3590
18	0.01	0.01	0.02	0.03	0.04	0.07	0.13	0.26		2460
24	0.02	0.03	0.04	0.06	0.07	0.14	0.27	0.54		1810
30	0.03	0.05	0.08	0.10	0.13	0.27	0.51			1450
36	0.05	0.09	0.13	0.18	0.21	0.42				1230
42	0.07	0.14	0.20	0.27	0.33	0.66				1040
48	0.10	0.20	0.29	0.39	0.48					890

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>									Max Load
	50	100	150	200	300	500	1000	2000		
12										7260
18	0.01	0.01	0.02	0.02	0.03	0.06	0.12	0.24		3130
24	0.02	0.04	0.05	0.07	0.09	0.18	0.35	0.67		1880
30	0.04	0.08	0.12	0.16	0.20	0.39				1020
36	0.09	0.17	0.25	0.34	0.42					810
42	0.15	0.29	0.43	0.58						560
48	0.24	0.48								450


**T-3310**  
T Bearing Bar  
1" Thick 33% Open Area  
2.28 lbs/ft<sup>2</sup>



Span (inch)	CONCENTRATED LOAD in lbs/ft of width									Max Load
	50	100	150	200	300	500	1000	2000		
12		0.01	0.01	0.01	0.02	0.03	0.06	0.11		1860
18	0.01	0.02	0.03	0.03	0.04	0.08	0.15	0.27		1250
24	0.02	0.03	0.05	0.06	0.08	0.15	0.29	0.58		950
30	0.03	0.06	0.09	0.11	0.14	0.28	0.55			765
36	0.05	0.10	0.14	0.19	0.24	0.47				635
42	0.08	0.15	0.22	0.30	0.38					550
48	0.11	0.22	0.36	0.45	0.55					470

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>									Max Load
	50	100	150	200	300	500	1000	2000		
12			0.01	0.01	0.02	0.02	0.03	0.07		7740
18	0.01	0.01	0.02	0.03	0.04	0.07	0.14	0.26		3310
24	0.02	0.04	0.06	0.08	0.09	0.18	0.36			1950
30	0.05	0.09	0.13	0.17	0.25	0.43				1250
36	0.09	0.18	0.27	0.35	0.48					830
42	0.16	0.33	0.49	0.64						650
48	0.28	0.55								490

**T-5010**  
T Bearing Bar  
1" Thick 50% Open Area  
1.82 lbs/ft<sup>2</sup>



Span (inch)	CONCENTRATED LOAD in lbs/ft of width									Max Load
	50	100	150	200	300	500	1000	2000		
12		0.01	0.01	0.02	0.03	0.04	0.08	0.16		1460
18	0.01	0.02	0.03	0.04	0.06	0.10	0.21	0.38		980
24	0.02	0.04	0.06	0.08	0.10	0.20	0.39			730
30	0.04	0.07	0.11	0.15	0.18	0.36				570
36	0.06	0.13	0.19	0.26	0.35	0.65				420
42	0.10	0.20	0.29	0.40	0.49					380
48	0.15	0.29	0.43	0.59						345

Span (inch)	UNIFORM LOAD in lbs/ft <sup>2</sup>									Max Load
	50	100	150	200	300	500	1000	2000		
12		0.01	0.01	0.01	0.02	0.03	0.04	0.10		5730
18	0.01	0.02	0.03	0.04	0.05	0.09	0.17	0.35		2920
24	0.03	0.06	0.07	0.10	0.12	0.25	0.51			1430
30	0.06	0.13	0.19	0.25	0.28	0.57				930
36	0.15	0.23	0.36	0.46	0.59					615
42	0.22	0.42	0.64							420
48	0.36									360












## Fiberglass Handrail

Manufactured with the pultrusion process, the fiberglass reinforced polyester handrail shapes contain up to 70% glass fibers, guaranteeing extraordinary mechanical properties to the system.


The handrail system is composed of various standard elements: vertical posts, fixing bases, various sections of shapes.

The handrail system is rigorously selected for its chemical resistance to aggressive agents. No additives are used: pure resin possesses an inalterable resistance which ensures a long service life.

Chemical inertia is at maximum levels as the composite, which is rich in glass fibers, is protected by an additional synthetic surface veil, that further increases the chemical resistance thanks to the resin rich surface.

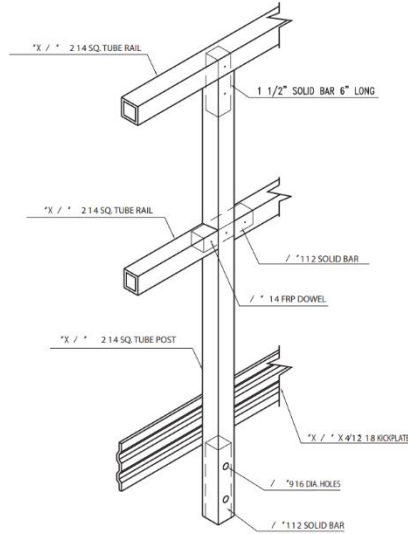

## Fiberglass Ladder

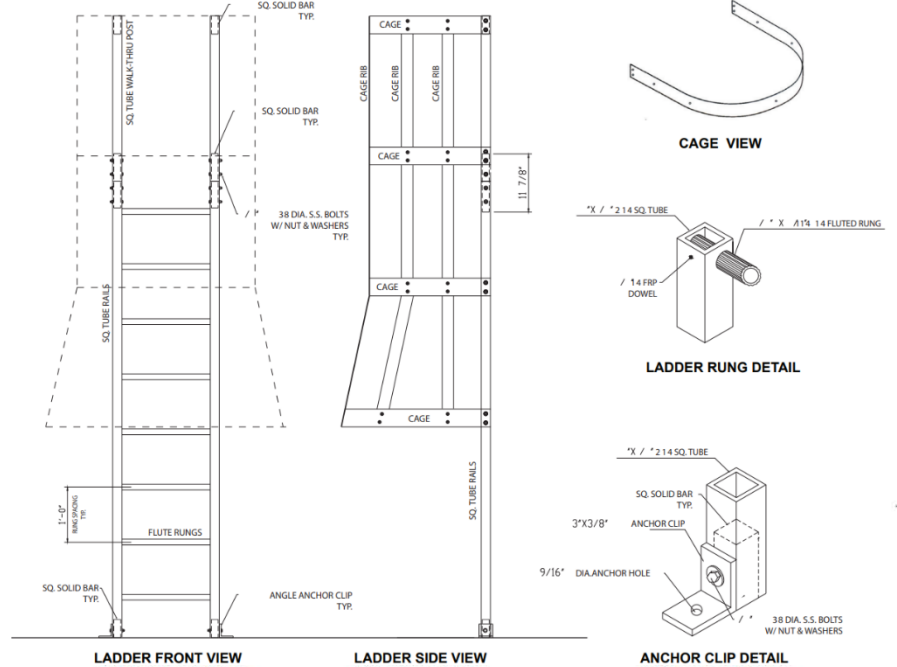

### Corrosion proof ladders

Manufactured with pultruded profiles, vertical ladders are suitable for any application in corrosive environments.

### Excellent mechanical resistance

The excellent mechanical resistance and the anti-slip rung profile, make the ladders ideal for intensive use.

### Easy to use

Supplied in the requested length. Their lightweight structure further helps installation procedures.

### Economical and durable

With a cost comparable to aluminum ladders vertical ladders are well known and appreciated for their distinctive features:

- resistance to impact (no permanent deformation due to temporary overloading and impact)
- electrical insulation
- attractive appearance (maintenance free over the year, no painting required and no corrosion problems)



## Stair Tread & Tread Covers



### Stair Tread

Manufactured with the same criteria as the gratings, with a reinforced nosing of a different color and integrated anti-slip surface, stair tread is a maximum safety product, its installation is advisable in all industrial environments.

### Stair Tread Covers

Stair cover represents the ideal solution to make stairways safer, both in civil and industrial environments. It can be installed on existing steps (made of wood, cement, steel, etc.) by simply fixing it with appropriate fixing clips. The special integration of the silica grains in the upper surface gives an excellent resistance to slip, even in the most extreme conditions (presence of water, ice, grease, oil, wax, etc.) Stair covers are supplied with a yellow integral nosing, emphasizing even more the safety features of the product.





Stair Tread Cover



Molded Stair Tread



Pultruded Stair Tread

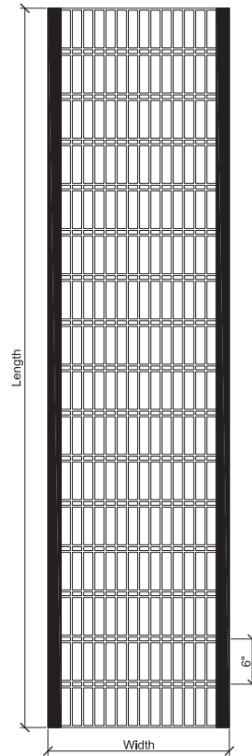


## Grating Fasteners

Hold-down clips should be used with a minimum of 4 clips per panel. Different fasteners available on request. All clips are made of SS316 stainless steel.



### M Clips

M clips are used to secure panels to a support using two adjacent grating bars for a secure fit.




### L Clips

L clips are used to fasten grating to a support bar for moderate loads.




### C Clips

C clips are used to join two ends of molded grating together.




### G Clips

G clips are designed to attach grating to any structural.




### Round Clips

Round clips are made specifically for plate or grating with plate on top.





## Standard Installation Clearances

A minimum of 1 1/2" bearing support should be provided under the edges of panels.

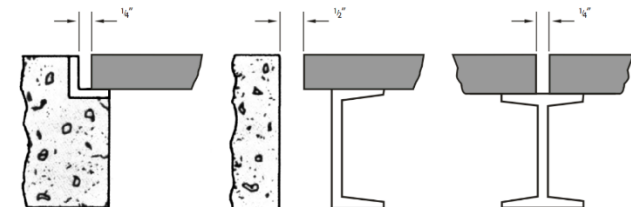


## Fiberglass Embedment Angle

Fiberglass pultruded embedment angles, with continuous integral anchors, provide corrosion resistant grating support in trenches and other concrete openings. Available for all thicknesses of grating. All embedment angles are supplied in a vinyl ester resin system with a Class 1 flame spread rating.

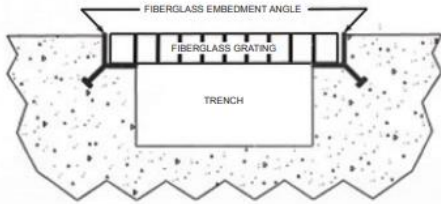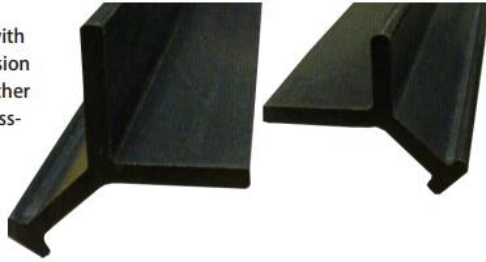


### FEATURES


- Corrosion resistant
- Low conductivity
- UV stable
- Fire retardant
- High strength
- Easy to install



1" Embedment Angle



1 1/2" Embedment Angle



2" Embedment Angle

## Fiberglass Structural Shapes Guide

WF-BEAM	CHANNEL	SQUARE TUBE	FLAT SHEET
SIZE (inch)	Lbs./Ft.	SIZE (inch)	Lbs./Ft.
4x4x1/4	2.33	1x1x1/8	0.39
6x6x3/8	5.28	1 1/2x1 1/2x1/8	0.76
8x8x3/8	7.10	1 1/2x1 1/2x1/4	1.15
		2x2x1/8	1.53
		2x2x1/4	1.24
		5x5x3/8	2.25
		2x1 1/4x1/4	1.86
		9x1/4	2.02
		10x1/4	2.02
		11x1/4	2.26
		12x1/4	4.01
		24x1/4	4.87
		36x1/4	7.49
		48x1/8	1.30
		48x3/16	1.88
		48x1/4	2.49
		48x3/8	3.51
		48x1/2	4.87
		48x3/4	5.86
		48x1	6.72
		48x1	8.65

I-BEAM	ANGLE	ROUND ROD	ROUND TUBE
SIZE (inch)	Lbs./Ft.	SIZE (inch)	Lbs./Ft.
8x4x3/8	4.43	1/4	0.04
10x5x1/2	8.02	3/8	0.10
12x6x1/2&1/4	7.39	3/4	0.38
		1	0.68
		1 1/2	1.53
		2	2.56

HANDRAIL CONNECTORS	LADDER RUNG	TOE PLATE	SQUARE BAR
SIZE (inch)	Lbs./Pc	SIZE (inch)	Lbs./Ft.
1 1/2 90° fixed	1.32	1 1/4x0.16	0.49
1 1/2 adjustable	1.32	1 3/8x0.18	0.52
		4x1/2x1/8	0.49
		6x1/2x1/8	0.74
		1x1	0.81
		1 1/2x1 1/2	1.87
		2x2	3.32

EMBEDMENT ANGLE	STAIR TREAD COVER
SIZE (inch)	Lbs./Ft.
1x1 1/2x1/4	0.78
1 1/2x1 1/2x1/4	0.89
2x1 1/2x1/4	0.99
1x6x1/4	0.76
1x9x1/8	1.08
1x12x1/8	1.42
1.5x9x1/8	1.10

Note: Other sizes are available on request.



## Fiberglass Structural Typical Coupon Properties

The following table shows test results for typical coupon properties and Structural fiberglass profiles (Standard, Fire Retardant and Vinylester shapes). Properties are derived per the ASTM test method shown. Synthetic surfacing veil and ultraviolet inhibitors are standard.

MECHANICAL PROPERTIES	ENGLISH			METRIC	
	ASTM	Value	Units	Value	Units
Tensile Stress, LW	D-638	41,000	psi	286.0	MPa
Tensile Stress, CW	D-638	7,400	psi	51.0	MPa
Tensile Modulus, LW	D-638	5.1	10 <sup>6</sup> psi	35.2	GPa
Tensile Modulus, CW	D-638	1.1	10 <sup>6</sup> psi	7.4	GPa
Compressive Stress, LW	D-695	33,000	psi	227.8	MPa
Compressive Stress, CW	D-695	16,000	psi	110.0	MPa
Compressive Modulus, LW	D-695	3.4	10 <sup>6</sup> psi	23.5	GPa
Compressive Modulus, CW	D-695	1.5	10 <sup>6</sup> psi	11.3	GPa
Flexural Stress, LW	D-790	55,000	psi	381.0	MPa
Flexural Stress, CW	D-790	11,000	psi	80.4	MPa
Flexural Modulus, LW	D-790	3.0	10 <sup>6</sup> psi	20.7	GPa
Flexural Modulus, CW	D-790	1.4	10 <sup>6</sup> psi	9.5	GPa
Modulus of Elasticity, E	Full Section	2.7	10 <sup>6</sup> psi	19.3	GPa
Shear Modulus	---	0.5	10 <sup>6</sup> psi	3.1	GPa
Short Beam Shear	D-2344	4350	psi	30.0	MPa
Punch Shear	D-732	11,000	psi	91.7	MPa
Notched Izod Impact, LW	D-256	39	ft.-lbs./in	3.12	J/mm
Notched Izod Impact, CW	D-256	6	ft.-lbs./in	0.32	J/mm
<b>PHYSICAL PROPERTIES</b>	<b>ASTM</b>	<b>Value</b>	<b>Units</b>	<b>Value</b>	<b>Units</b>
Barcol Hardness	D-2533	55	---	55	---
24 Hour Water Absorption	D-570	0.3	% max	0.3	% max
Density	D-792	0.063-0.07	lbs./in. <sup>3</sup>	1.74-1.95	g/cc
Coefficient of Thermal Expansion, LW	D-696	4.9	10 <sup>-6</sup> in./in./°F	8.4	10 <sup>-6</sup> mm/mm/°C
<b>ELECTRICAL PROPERTIES</b>	<b>ASTM</b>	<b>Value</b>	<b>Units</b>	<b>Value</b>	<b>Units</b>
Arc Resistance, LW	D-495	132	seconds	132	seconds
Dielectric Strength, LW	D-149	35	kv./in	11.8	kv./mm
Dielectric Strength, PF	D-149	217	volts/mil.	217	volts/mil.
Dielectric Constant, PF	D-150	5	@60hz	5	@60hz
<b>FLAMMABILITY PROPERTIES</b>	<b>ASTM</b>		<b>Units</b>		<b>Value</b>
Tunnel Test	E-84		Flame Spread		15 max.
Flammability	D-635		---		Nonburning
UL	94				V0
NBS Smoke Chamber	E-662		Smoke Density		600-700

LW = Lengthwise CW = Crosswise PF = Perpendicular to Laminate Face

## Chemical Resistance Guide

Chemical Environment	Concentration %	Temp °F	Molded Grating			Pultruded Grating & Structural Shapes	
			VFR	IFR	GP	VFR	IFR
Acetic Acid	50	MAX	C	C	S	C	C
Aluminum Hydroxide	ALL	MAX	C	C	C	C	C
Ammonium Chloride	ALL	120	C	C	C	C	C
Ammonium Bicarbonate	15	120	C	C	S	C	S
Ammonium Bicarbonate	50	120	C	C	S	S	I
Aluminum Hydroxide	20	80	S	N	N	I	N
Ammonium Sulfate	ALL	120	C	C	C	C	S
Calcium Carbonate	ALL	MAX	C	C	S	C	C
Calcium Niterate	ALL	MAX	C	C	C	C	C
Carbon Tetrachloride	100	80	I	N	N	I	N
Chlorine, Dry Gas	ALL	MAX	C	C	S	C	S
Chlorine Water	SAT	120	C	I	N	I	N
Chromic Acid	50	150	I	N	N	I	N
Copper Chloride	ALL	MAX	C	C	C	C	C
Copper Cyanide	ALL	140	C	S	I	S	I
Copper Nitrate	ALL	MAX	C	C	C	C	C
Ethanol	10	120	C	S	S	C	S
Ethanol	50	120	C	I	I	C	I
Ethylene Glycol	ALL	ISO	C	C	S	C	S
Ferric Chloride	100	MAX	C	C	C	C	C
Forrosus Chloride	ALL	MAX	C	C	C	C	C
Formaldehyde 0-50%	50	120	S	I	I	S	I
Gasoline	ALL	120	C	C	S	C	S
Glucose	ALL	120	C	C	C	C	C
Glycerin	100	MAX	C	C	S	C	S
Hydrobromic Acid	50	MAX	S	S	I	I	N
Hydrobromic Acid	10	MAX	C	S	S	S	S
Hydrobromic Acid	37	MAX	I	S	I	I	I
Hydrogen Peroxide	30	80	C	N	N	S	N
Nickel Sulfate	ALL	MAX	C	C	C	C	C
Nitric Acid	20	120	S	S	I	I	I
Oxalic Acid	ALL	150	C	C	S	C	S
Perchloric Acid	30	90	S	I	I	I	I
Phosphoric Acid	80	MAX	C	C	C	C	S
Potassium Chloride	ALL	MAX	C	C	C	C	C
Potassium Dichromate	ALL	MAX	C	C	C	C	C
Potassium Nitrate	ALL	MAX	C	C	C	C	C
Potassium Sulfate	ALL	MAX	C	C	C	C	C
Propylene Glycol	ALL	MAX	C	C	S	C	S
Sodium Acetate	ALL	MAX	C	C	C	C	C
Sodium Bisulfate	ALL	80	S	S	I	C	I
Sodium Bromide	ALL	80	C	C	C	C	C
Sodium Cyanide	ALL	80	C	I	I	S	I
Sodium Hydroxide	10	MAX	C	I	N	I	N
Sodium Hydroxide	50	MAX	S	N	N	N	N
Sodium Nitrate	ALL	MAX	C	C	C	C	C
Sodium Sulfate	ALL	MAX	C	C	C	C	C
Tartaric Acid	ALL	MAX	C	C	S	C	S
Vinegar	ALL	MAX	C	C	S	C	S
Water, Distilled	ALL	MAX	C	C	C	C	C

C = Continuous exposure of the grating to the chemical environment listed at the temperature listed.  
 S = Frequent exposure of the grating to splashes and spills from the chemical environment listed with that environment at the temperature listed.  
 I = Infrequent exposure of the grating to splashes and spills from the chemical environment listed with that environment at the temperature listed and the spill immediately cleaned up or washed from the grating.  
 N = Not recommended for the concentrations and temperatures listed.